

# Commercial Infloor Simple Stow™



**BUY ON:  
NEW YORK  
STATE OGS  
CONTRACT  
PC70594**

 **BraunAbility®**

As the foremost name in mobility, we proudly present the new BraunAbility Commercial Infloor Simple Stow™. Rooted in our unwavering commitment to trust and reliability, this vehicle is more than transportation, it's an emblem of inclusivity. Boasting a redesigned infloor ramp assembly with extended handle for user-friendly operation, our ADA-Compliant Vehicle promises ease in mobility. The Commercial Infloor Simple Stow sets the gold standard for accessible travel from the brand that's earned the resounding endorsement of mobility technicians at an impressive 15:1\* ratio. Safety is paramount, evident in crash tests exceeding Federal Motor Vehicle Safety Standards (FMVSS) and backed by a three-year limited warranty. Your journey to reliable and trustworthy mobility starts here.

\* Based on a 2022 Dealer Service Technician Survey

- Easy to Use Ramp: Low effort deployment of infloor ramp with 60% less force
- User-Friendly Operation: An extended handle for convenient operation designed to reduce the need to bend down for most users
- Durability Tested: Enduring over 30,000 stow and deploy cycles at 150% of the recommended maximum operating speed, providing peace of mind for rigorous commercial use
- ADA-Compliant design with fixed 2-inch-high edge guards for simplicity and durability
- Versatility: Optional 2nd Row Freedman 2-passenger seat, catering to diverse transportation needs.
- Option for BuyAmerica compliant conversion is available



[braunability.com/commercial](https://braunability.com/commercial)

800.488.0359



# Commercial Infloor Simple Stow™





## Standard Features

- ADA, FMVSS and CMVSS Compliant
- CARB approved
- 7-passenger vehicle (with optional aftermarket 2nd row 2-passenger folding bench seat)
- Lowered floor from toepan to rear axle
- 60" floor-to-ceiling at center of van
- 30" wide manual infloor Simple Stow™ ramp - 1,000 lb capacity
- Multiple wheelchair securement locations
- One wheelchair securement system - Q'STRAIN M-Series
- OEM driver and passenger side power sliding door providing 56" vertical opening (ADA compliant), passenger door provides clear opening width of 31" (excluding OEM grab handle)
- Step-and-Roll removable front passenger seat
- 3-passenger bench seat at rear with folding footrest
- Front passenger floor tracks for wheelchair securement, with 60" floor-to-ceiling height
- TPO plastic lower body panels with integrated steps
- Vinyl flooring with 3/8" thermoplastic honeycomb panel subfloor
- ADA-compliant park interlock
- ADA-compliant ramp and door entrance lighting
- Priority seating and wheelchair securement location decals
- Auxiliary wiring harnesses include fused circuits
- Emergency rear hatch release
- Easy maintenance interior trim package
- 19 gallon OEM fuel tank

## Optional Features

- Aftermarket 2nd row 2-passenger folding bench seat
- DOT kit
- Additional set of tie-downs

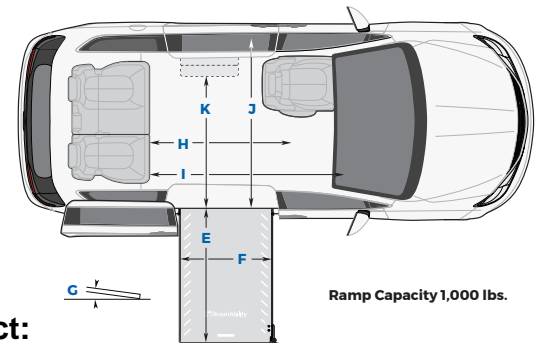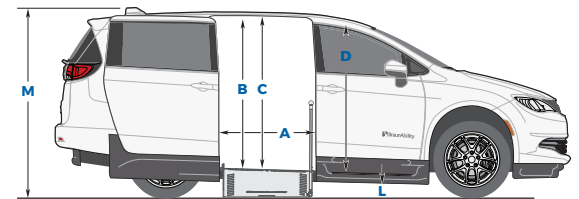

Ramp Capacity 1,000 lbs.

**For Info Contact:**  
**Rich Solano Cell/Text (518) 390-1243**  
**rsolano@mbuscommercial.com**

All dimensions are for reference only

## Dimensions

Door Opening Usable Width	<b>A</b>	31.5"
Door Opening Usable Height (at middle of door - at airbag)	<b>B</b>	56.75" - 56"
Interior Height at Center of Van	<b>C</b>	60"
Interior Height at Driver and Passenger Position	<b>D</b>	60"
Ramp Length*	<b>E</b>	63.5"
Ramp Width (Usable Clear Opening)	<b>F</b>	30"
Ramp Angle**	<b>G</b>	11°
Interior Floor Length (Behind Front Seat Strikers)	<b>H</b>	66"
Overall Interior Floor Length (Flat Area)	<b>I</b>	98.5"
Interior Width at Passenger Doors (Doors Closed)	<b>J</b>	64"
Interior Width - Ramp (Deployed) to Optional 2-Passenger Seat (Stowed)	<b>K</b>	49"
Ground clearance at Lowest Point (Curb Weight)	<b>L</b>	5.6"
Overall Vehicle Height (Unloaded)	<b>M</b>	80"

Due to manufacturing tolerances both with the OEM vehicle and the conversion components, all dimensions may vary slightly from those shown.

\* End of ramp to flat floor (including transition flap).

\*\* Ramp angle may vary based on chassis trim level and other environmental factors.



[braunability.com/commercial](http://braunability.com/commercial)

800.488.0359

